





Up for low, medium and heavy load capacity.




"The single column goods lift"

UP is an electro-hydraulic vertical goods lift designed for the vertical transportation of goods at various underground or above-ground levels, for loads from 300Kg to 2500Kg. UP has a structure fixed to the wall made of special structural steel profiles in which slides combined bearings. The platform is driven by an hydraulic cylinder with chain transmission.

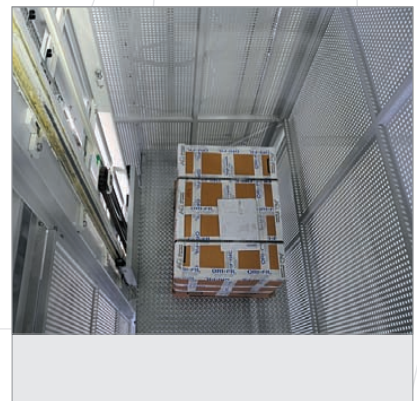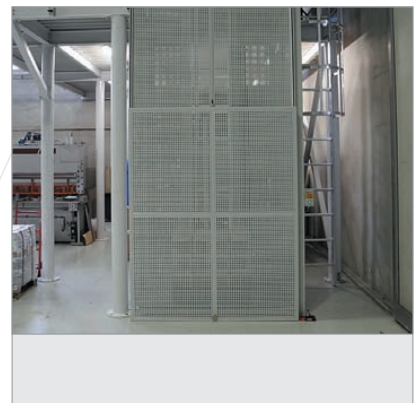

Manufactured by:

UP **DINAMIC**
S.r.l.



Available versions:

▶ UP3 and UP6 for low capacity

with capacity from 300 to 600 Kg can be installed wherever you need to store containers, pallets, crates, boxes, and other heavy goods on various levels such as mezzanines or wine cellars.


	Capacity	Elevation max	Pit	L x P max	Floor stops Std/max	Power supply
UP3	300Kg	6 m	12 cm	170x130 cm	2/4	220V
UP6	600Kg	6 m	12 cm	130x90 cm	2/4	220V

▶ UP10, UP15, UP20, UP25 UP6 for medium and heavy load capacity

with capacity from 1000 to 2500 Kg can be installed in pre-built or existing shaft with difficult access, thanks to the removable structure. Customizable platform dimension, apart from in private storerooms or industrial and commercial warehouses.

	Capacity	Elevation max	Pit	L x P max	Floor stops Std/max	Power supply
UP10	1000Kg	12 m	15 cm	280x200 cm	2/4	400V
UP15	1500Kg	12 m	15 cm	250x170 cm	2/4	400V
UP20	2000Kg	12 m	25 cm	240x240 cm	2/4	400V
UP25	2500Kg	12 m	25 cm	250x180 cm	2/4	400V

▶ Up SPB The Goods lift with operator in board

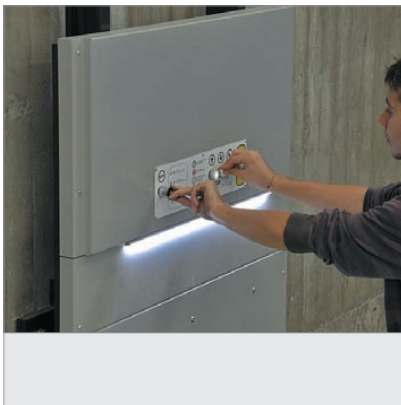

All UP versions with capacity from 300 Kg to 2500 Kg can be supplied with the homologated SPB system.



Up Dinamic S.r.l.
Via Franco Modigliani 22
37045 - Legnago (VR) Italy

For information:
www.updinamic.com
Tel. +39.0442.590.129
Fax +39.0442.599.091
E-mail: info@updinamic.com

▶ UP straight-guides construction

The standard construction of the elevator with (straight guide) structural steel beams can get a very limited containment pit of the platform.



▶ UP-R with upside-down carriage

UP-model goods lifts can be constructed in the UPR system with an **upside down carriage** so as to eliminate the protrusion of the guides beyond the upper landing level.



The **UPR** also can be constructed with a cabin and detachable roof. With this solution, the goods lift can **"disappear underground"**.

